

# ULTRA-ZONE®

Forced Air Zone Controls

## MODEL ND Series Dampers

Construction-  
Heavy Duty extruded aluminum.

Nylon Bearings for quiet operation.

Overlapping parallel blades for low leakage.

Power open/Power closed.

Designed to operate at static pressures up to 1.5"  
w/ less than 5% Leakage.

UL Listed Motor Actuator is a 24vac 3 wire power  
open/ power close type rated at 18"lbs. of torque.

The Motor Actuator housing is NEMA1 Rated.


End-Stops Adjustment allows for a percentage of  
Relief Air (Leakage) to be set when the damper is  
powered to closed and/or you may set a maximum  
open position as well.

Bright LED's Indicate damper position.





Available in 8" x 6" thru 30" x 30" in one inch  
increments. Custom Sizes can be manufactured,  
contact EWC Controls Inc.

## SUBMITTAL SHEET

Model ND Rectangular Dampers  
with MA-ND5 Actuator

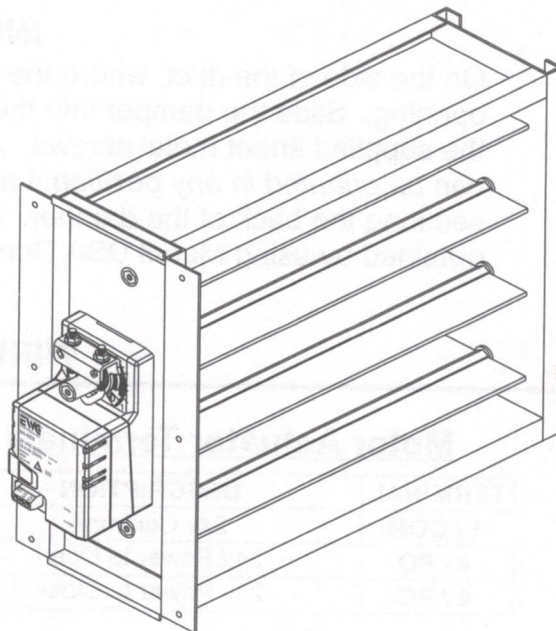

DIMENSIONAL  
DRAWINGS

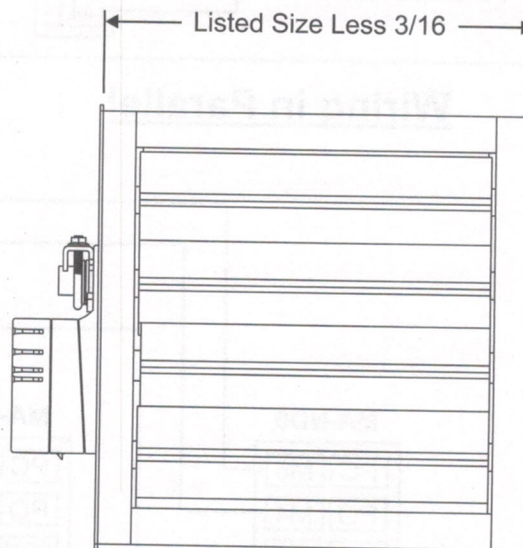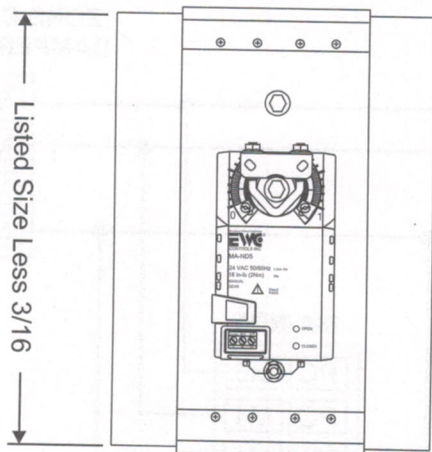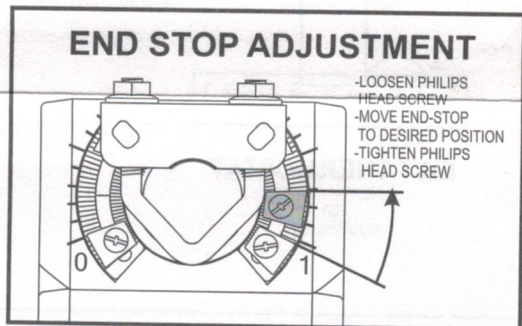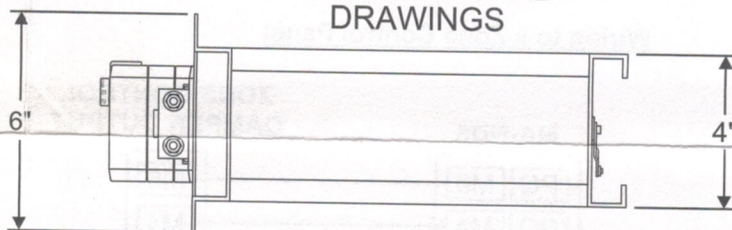

### SUBMITTAL FORM

SUBMITTED BY: \_\_\_\_\_

JOB: \_\_\_\_\_

ARCHITECT: \_\_\_\_\_

ENGINEER: \_\_\_\_\_

CONTRACTOR: \_\_\_\_\_

LOCATION: \_\_\_\_\_

Excellence Without Compromise

**EWC**®  
CONTROLS INC.

385 Hwy. 33  
Englishtown, NJ 07726  
Ph: 800-446-3110  
Fx: 732-446-5362

P/N 090377A0071 REV. Q 08.27.11  
Copyright © 2000 EWC Controls Inc., All Rights Reserved.